


## P-MOZ20IC5-E



No outdoor unit. Just two 162mm holes\*

The RAC Solo range offers great installation flexibility as it is a stand-alone unit with no refrigerant connections during installation. The outdoor unit is replaced by two holes in the wall.  
\* 202mm for the biggest capacity.

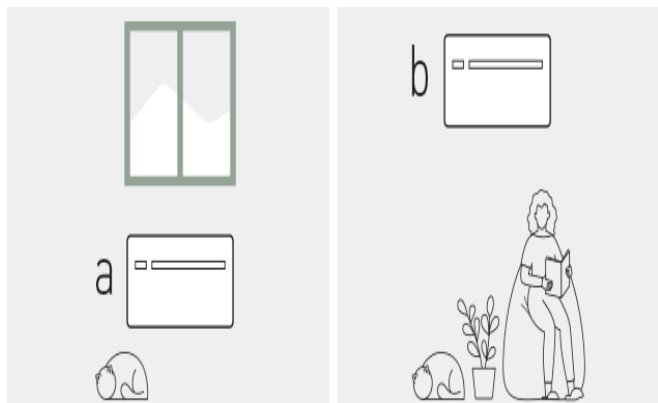

Easy and flexible installation


All you need is a perimeter wall, to exchange air with the outside. The unit can be placed high on the wall or low on the floor.  
a. Down installation / b. Overhead installation.



AC Quick Selector

Helping you to find the Air Conditioning solution for up to five individual rooms, in just a few clicks!

[TRY THE DOMESTIC AIRCON QUICK SELECTOR](#)

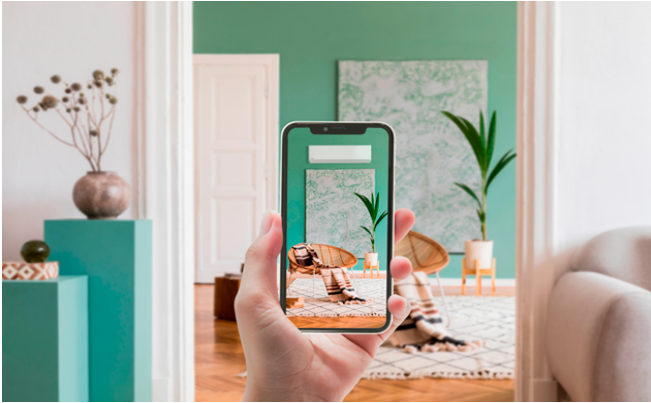

## AR Heat Pump Viewer

Interested to see how a Panasonic Air Conditioner looks in your home?  
Try the new Panasonic AR projector, utilising augmented reality!

[TRY THE AIR CONDITIONER AR HEAT PUMP VIEWER](#)

| RAC Solo · R290 / R32        |        |        |
|------------------------------|--------|--------|
|                              |        | 2.0 kW |
| Dimension (Width)            | mm     | 1010   |
| Operating range (Heat - Max) | °C     | +18    |
| Cooling capacity (Min)       | kW     | 0,83   |
| Cooling capacity (Max)       | kW     | 2,64   |
| Heating capacity (Min)       | kW     | 0,71   |
| Heating capacity (Max)       | kW     | 2,64   |
| Moisture removal volume      | L/h    | 0,8    |
| COP (1)                      | W/W    | 3,31   |
| Air flow (Med)               | m³/min | 5,2    |
| Dimension (Height)           | mm     | 549    |
| Operating range (Heat - Min) | °C     | -15    |
| Dimension (Depth)            | mm     | 165    |
| Power supply                 | V      | 230    |
| EER (1)                      | W/W    | 3,29   |
| Input power cooling          | kW     | 0,64   |
| Input power heating          | W      | 0,63   |
| Air flow (Max)               | m³/h   | 6,3    |
| Sound pressure (Lo) (3)      | dB(A)  | 30     |
| Sound pressure (Hi) (3)      | dB(A)  | 39     |
| SEER (2)                     |        | 4,70 A |
| SCOP (2)                     |        | 3,80 A |
| Operating range (Cool - Min) | °C     | -5     |
| Cooling capacity (Nominal)   | kW     | 2,09   |
| Heating capacity (Nominal)   | kW     | 2,08   |
| Net weight                   | kg     | 41     |
| Heating capacity at -7°C     | kW     | 1,37   |

|                                 |    |        |
|---------------------------------|----|--------|
| RAC Solo • R290 / R32           |    | 2.0 kW |
|                                 |    |        |
| Operating range<br>(Cool - Max) | °C | +43    |

Complementary products