


P-MOZ25IC5-E



No outdoor unit. Just two 162mm holes*

The RAC Solo range offers great installation flexibility as it is a stand-alone unit with no refrigerant connections during installation. The outdoor unit is replaced by two holes in the wall.
* 202mm for the biggest capacity.

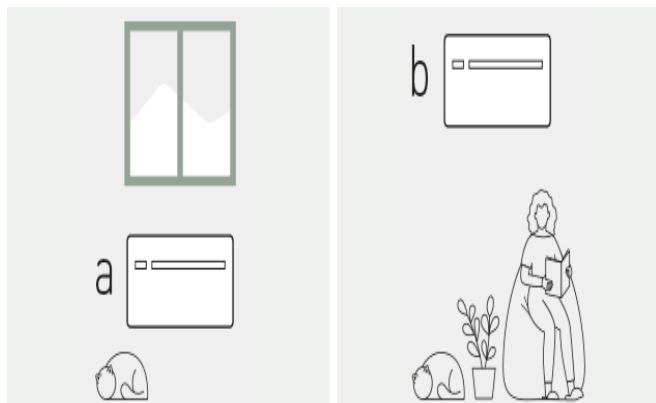

Easy and flexible installation

All you need is a perimeter wall, to exchange air with the outside. The unit can be placed high on the wall or low on the floor.
a. Down installation / b. Overhead installation.



AC Quick Selector

Helping you to find the Air Conditioning solution for up to five individual rooms, in just a few clicks!

[TRY THE DOMESTIC AIRCON QUICK SELECTOR](#)



AR Heat Pump Viewer

Interested to see how a Panasonic Air Conditioner looks in your home?
Try the new Panasonic AR projector, utilising augmented reality!

[TRY THE AIR CONDITIONER AR HEAT PUMP VIEWER](#)

RAC Solo · R290 / R32		
		2.5 kW
Dimension (Width)	mm	1010
Operating range (Heat - Max)	°C	+18
Cooling capacity (Min)	kW	0,92
Cooling capacity (Max)	kW	3,10
Heating capacity (Min)	kW	0,79
Heating capacity (Max)	kW	3,05
Moisture removal volume	L/h	0,9
COP (1)	W/W	3,28
Air flow (Med)	m³/min	5,3
Dimension (Height)	mm	549
Operating range (Heat - Min)	°C	-15
Dimension (Depth)	mm	165
Power supply	V	230
EER (1)	W/W	3,25
Input power cooling	kW	0,73
Input power heating	W	0,71
Air flow (Max)	m³/h	6,7
Sound pressure (Lo) (3)	dB(A)	31
Sound pressure (Hi) (3)	dB(A)	41
SEER (2)		4,60 B
SCOP (2)		3,70 A
Operating range (Cool - Min)	°C	-5
Cooling capacity (Nominal)	kW	2,33
Heating capacity (Nominal)	kW	2,31
Net weight	kg	41
Heating capacity at -7°C	kW	1,52

RAC Solo • R290 / R32		2.5 kW
Operating range (Cool - Max)	°C	+43

Complementary products